



REVIT MANUAL


Fire damper

FDC25 | FDC40



SUMMARISED REVIT BIM MANUAL SOLID AIR MODELS

SUMMARISED MANUAL REVIT BIM-MODELS SOLID AIR

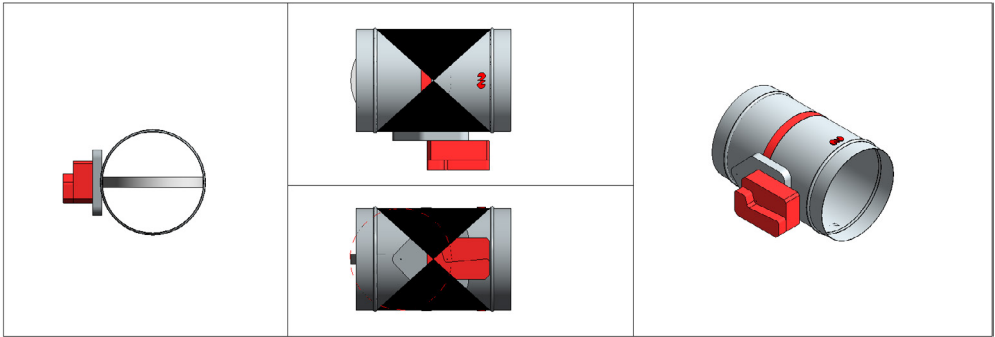

Text		
SACS_Warning_Text_Flow		Warnings when outcomes are outside the given threshold values.
SACS_Warning_Text_Size		
Dimensions		
NLRS_M_c01_diameter	250.0	Nominal duct diameter.
SACS_Duct_Used_size	250.0	Corrected available damper size.
NLRS_C_lengte	296.0	Length of the fire damper.
Size	250 Ø - 250 Ø	
Mechanical - Flow		
NLRS_M_c01_debiet	800.0000 m³/h	Air flow*.
NLRS_M_c01_drukverlies_statisch	5.000000 Pa	Static pressure loss at airflow.
SACS_Air_Velocity	4.53 m/s	Air velocity with flow.
SACS_Lp_dBA	31	Sound power level at airflow.
SACS_Nominal_Min_Flow	2121.0000 m³/h	
SACS_Nominal_Max_Flow	265.0000 m³/h	
SACS_Use_Manual_Airflow	<input checked="" type="checkbox"/>	Enter flow manually.
SACS_Manual_Airflow	800.0000 m³/h	Manual flow.
Pressure Drop		
Identity Data		
NLRS_C_model	FDC25 O R O 250	Article name selected damper.
SACS_Article_Code	9250010004	Order number**.
SACS_Gross_Cost	146.00	Gross price**.
SACS_Price_Date	1-10-2021	Validity date price.
Sacs_Type_Mark		

Model Properties		
SACS_Option_1	O = geen frame	Frame version.
SACS_Option_2	R = Handbediend, geen eindsc...	Operating version.
SACS_Option_3	O = Geen Accessoire	Smoke sensor accessory.
SACS_Belimo_Rotation (1-3)	1	Rotation of motor operation (if applicable).
Visibility		
SACS_Disable_Warning	<input type="checkbox"/>	Hide warning on model.

Notes

*The air volume that forms the basis for the duct calculations can be entered manually or it can be determined by the system (default). When an air volume has been entered manually, this does not impact the air volumes that Revit calculates further on in the duct system.

**The order number is only given when it concerns a standard product.

Accessories

The options that are available for the FDC25 and FDC40, are also available in this model. The smoke sensor is the exception. If a smoke sensor is required, the model with the sensor must be used.



Solid Air International
A. PO Box 14, 9610 AA Sappemeer
T. +31 598 36 12 21
E. contact@solid-air.com
W. www.solid-air.com